

Tortoise [Split] [01]




COBBLESTONES

COLOUR RANGES

Buffalo
Cobb & Co
Porphyry
Raven
Sesame
Silex
Tortoise

Tortoise [Split] [02]

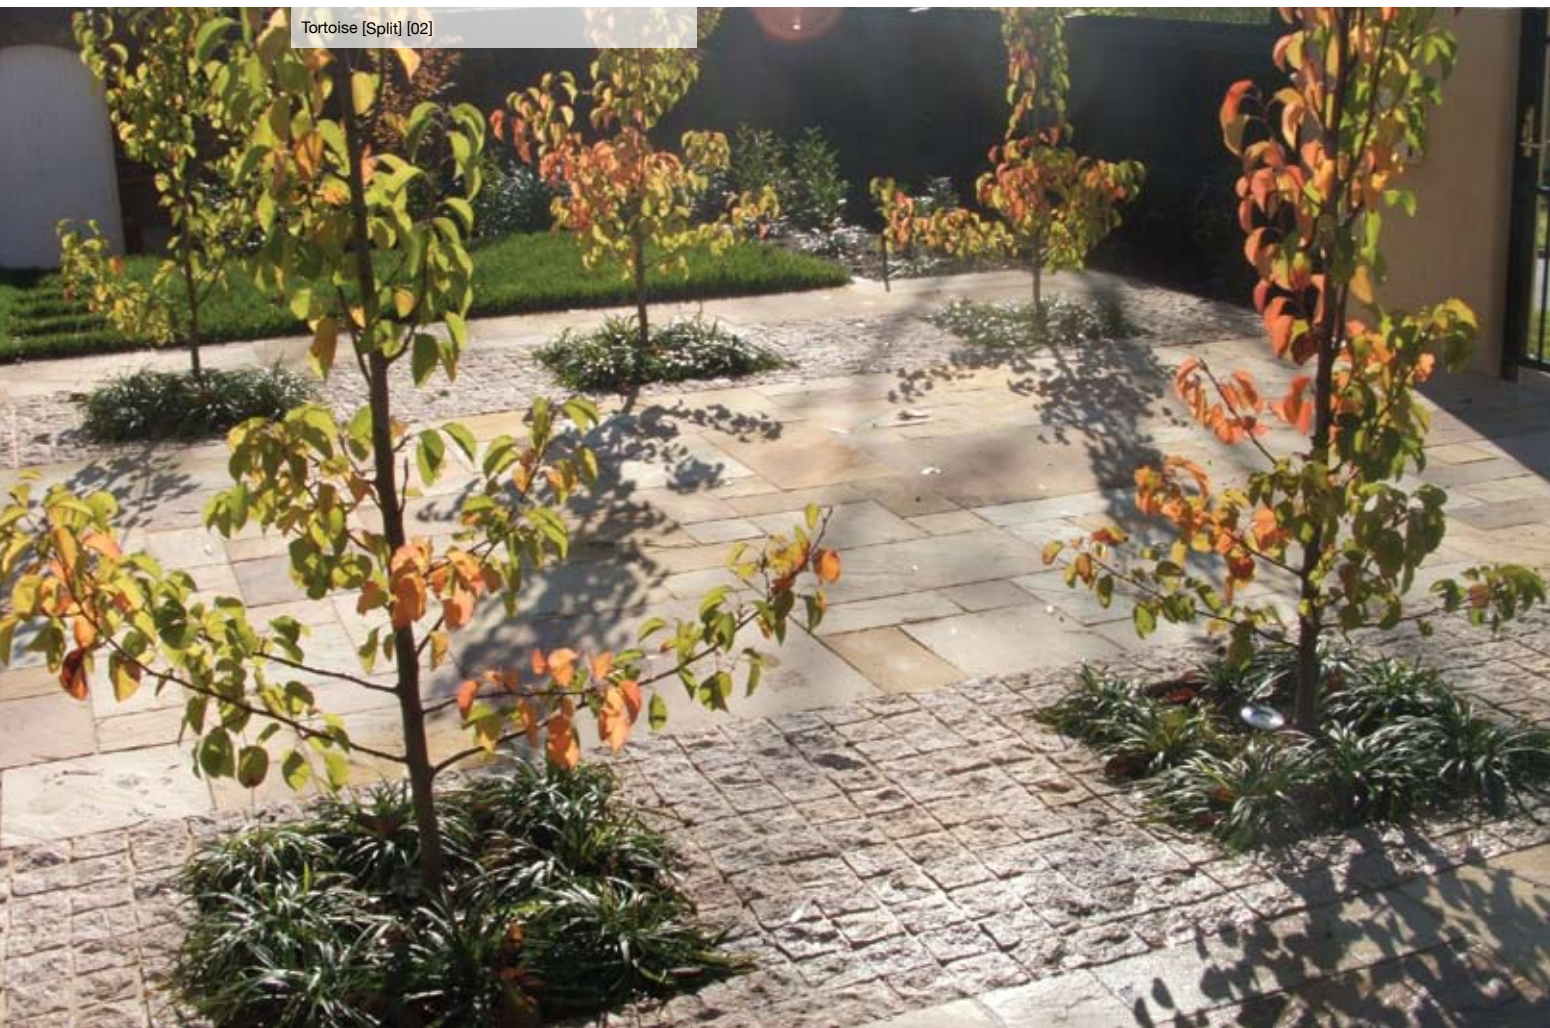

Colour Range in Split Surface




Buffalo



Cobb & Co



Porphyry

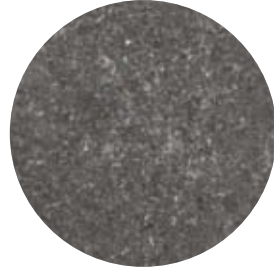


Raven



Sesame



Silex

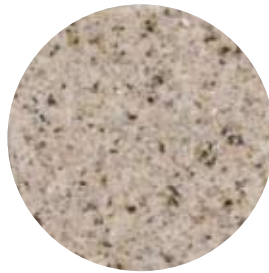

Tortoise

Colour Range in Bush Hammered



Buffalo



Raven

Tortoise">



Sesame



Project Credits


- 01 The Garden Company VIC
- 02 The Garden Company VIC
- 03 Mahony Landscapes NSW
- 04 Mahony Landscapes NSW
- 05 Mark Lanning Landscapes NSW
- 06 Phillips Henningham Architects NSW
- 07 Rolling Stone Landscapes NSW
- 08 Joanne Green Landscapes NSW

Buffalo [Split with exfoliated step tread] [03]




+ The thickness and size of cobbles makes them the perfect solution for demanding environments.

Cobb & Co detail

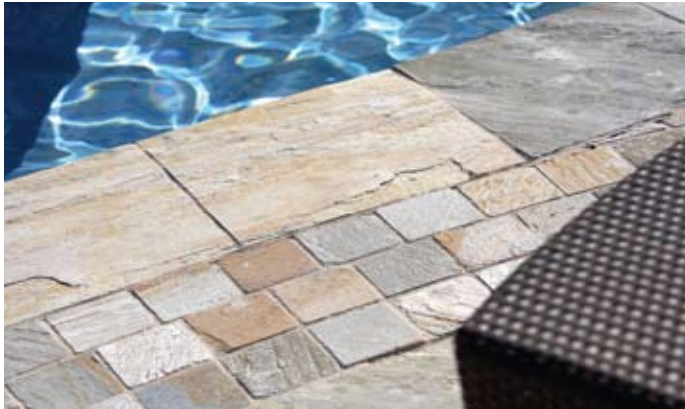

Raven [Bush-Hammered Cobble with Exfoliated Tile]

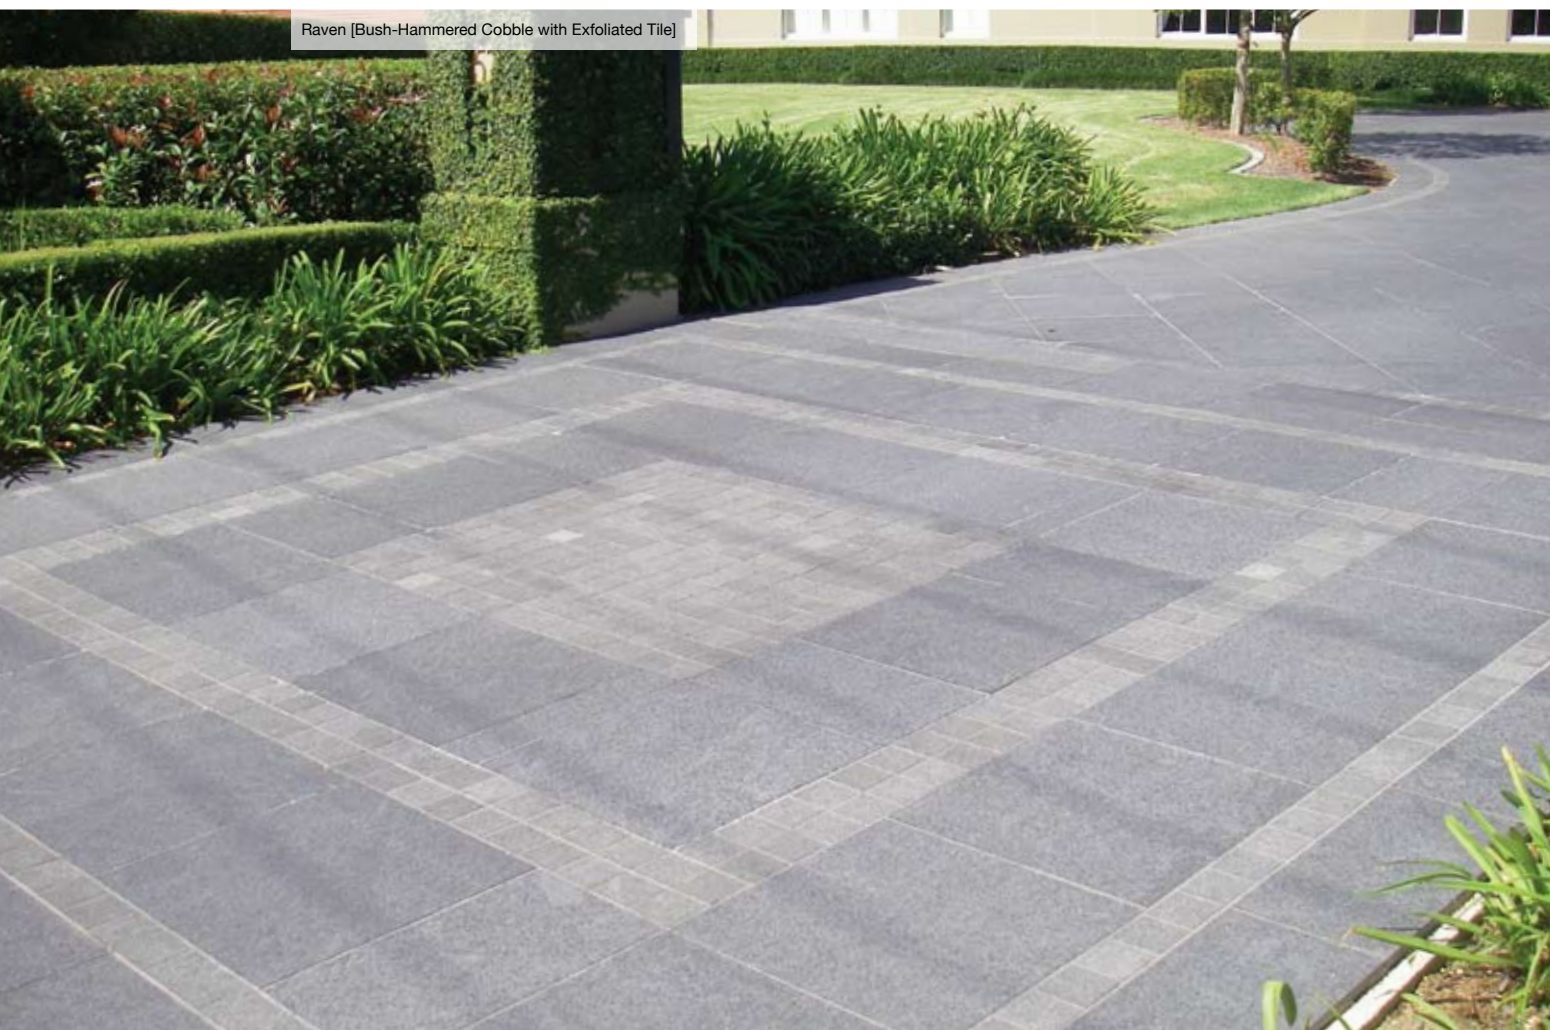

Cobbles provide an opportunity to add texture to a space whilst working within the existing colour palette.



COBBLESTONES

Tortoise [Bush Hammered] [06]



+ Cobbles are ideal for driveways or high traffic areas.

Buffalo [Split]



Porphyry



COBBLESTONES

+ The unit size of cobbles makes them ideal for dealing with curved areas.

Cobb & Co Driveway Border [07]




Tortoise [Split]



Tortoise [Bush Hammered]



Great
for
high
traffic
areas

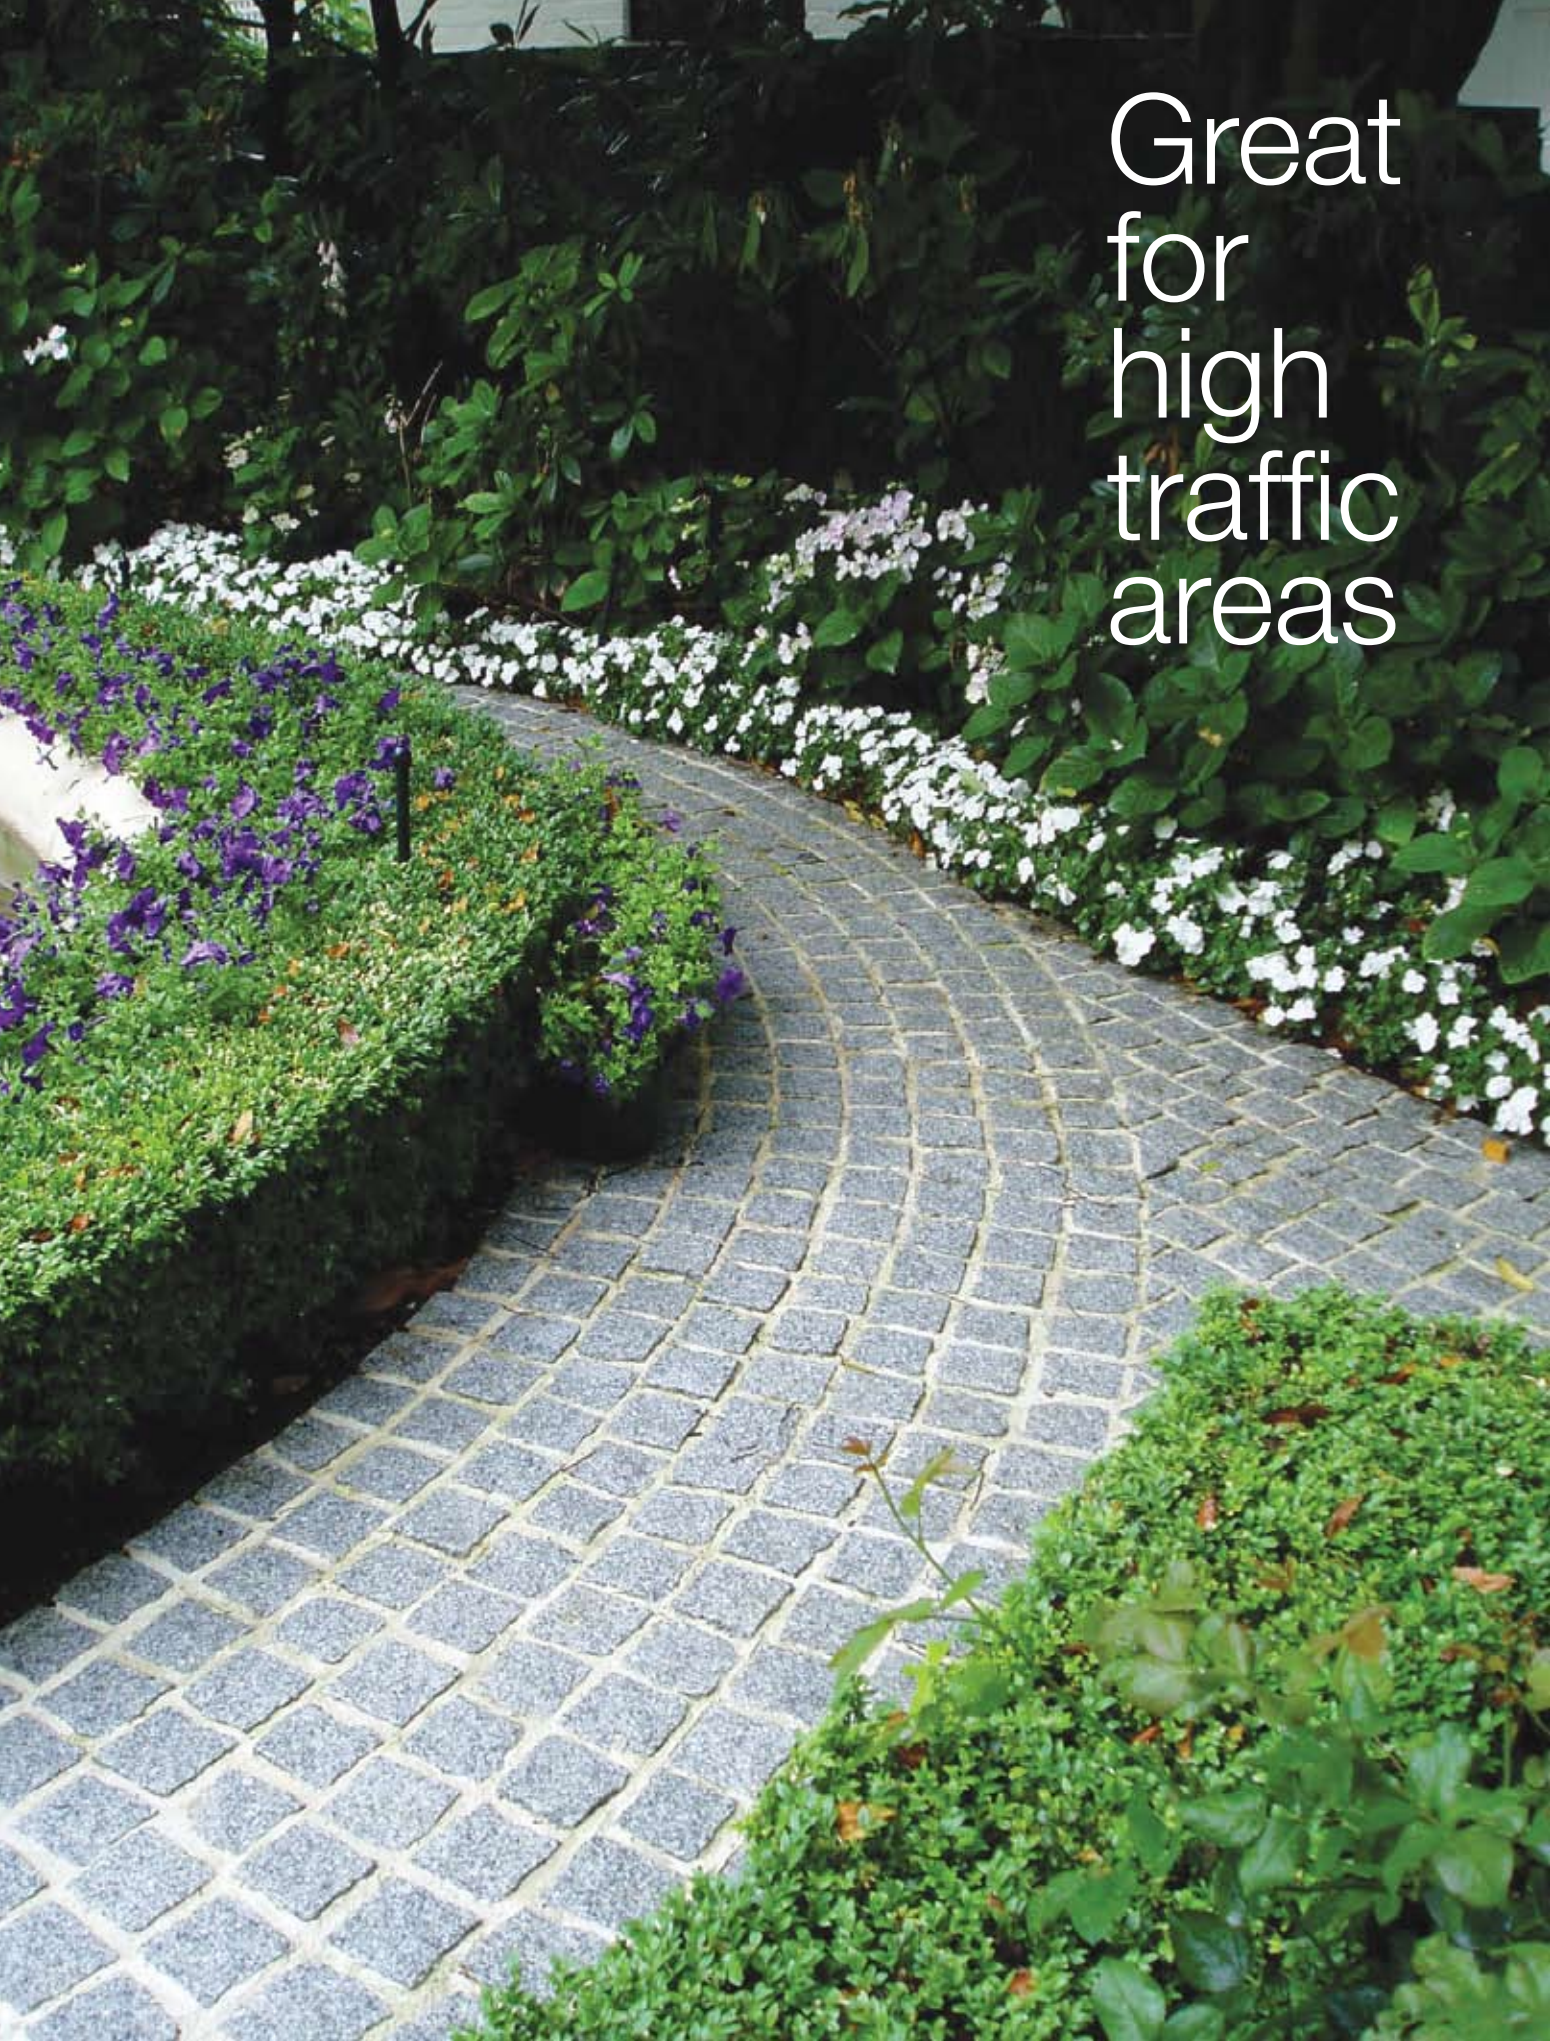

The blend of individual
cobblestones creates
a stunning overall
colour palette




Cobblestone paving elements (sometimes referred to as granite setts) have been used in construction since the dawn of architecture. Traditionally used as a hard road surface, this style of paving has now been adopted and utilised as a core flooring alternative for residential and commercial projects alike.

Incorporating stone varieties such as granite, porphyry, gneiss and hardened quartz limestone, cobblestones are an extremely dense and hard wearing material. Typically produced in small sizes these paving units are ideal for driveways, curved paths or can be used as an accent in conjunction with other flooring materials.

Sizes

Tiles



Cobb & Co

100x100mm, 15-18mm
Split finish top surface and
sawn other 5 sides

Sesame & Silex

100x100mm, 30mm
Split finish top surface and
sides, sawn on the bottom side

Cobblestones are usually installed
with a 10mm grout joint.

These products are typically
installed on a 25mm wet mortar
bed over a concrete slab.

Other surface textures and sizes
are available on request.

For further information, installation
tips and pricing please call a
showroom on 1300 13 14 13.

Porphyry

100x100mm, 20-40mm
Split finish on all six sides

Raven, Buffalo & Tortoise

100x100mm, 20mm
Split finish top and sides,
sawn bottom

100x100mm, 30mm
Bush Hammered top surface,
split sides, sawn bottom



For more downloadable imagery visit www.ecooutdoor.com.au