



STONE WALL PANELS

COLOUR RANGES

Feathertop

Flinders


Grampians

Lang Lang

Macedon

Otway

Flinders [02]

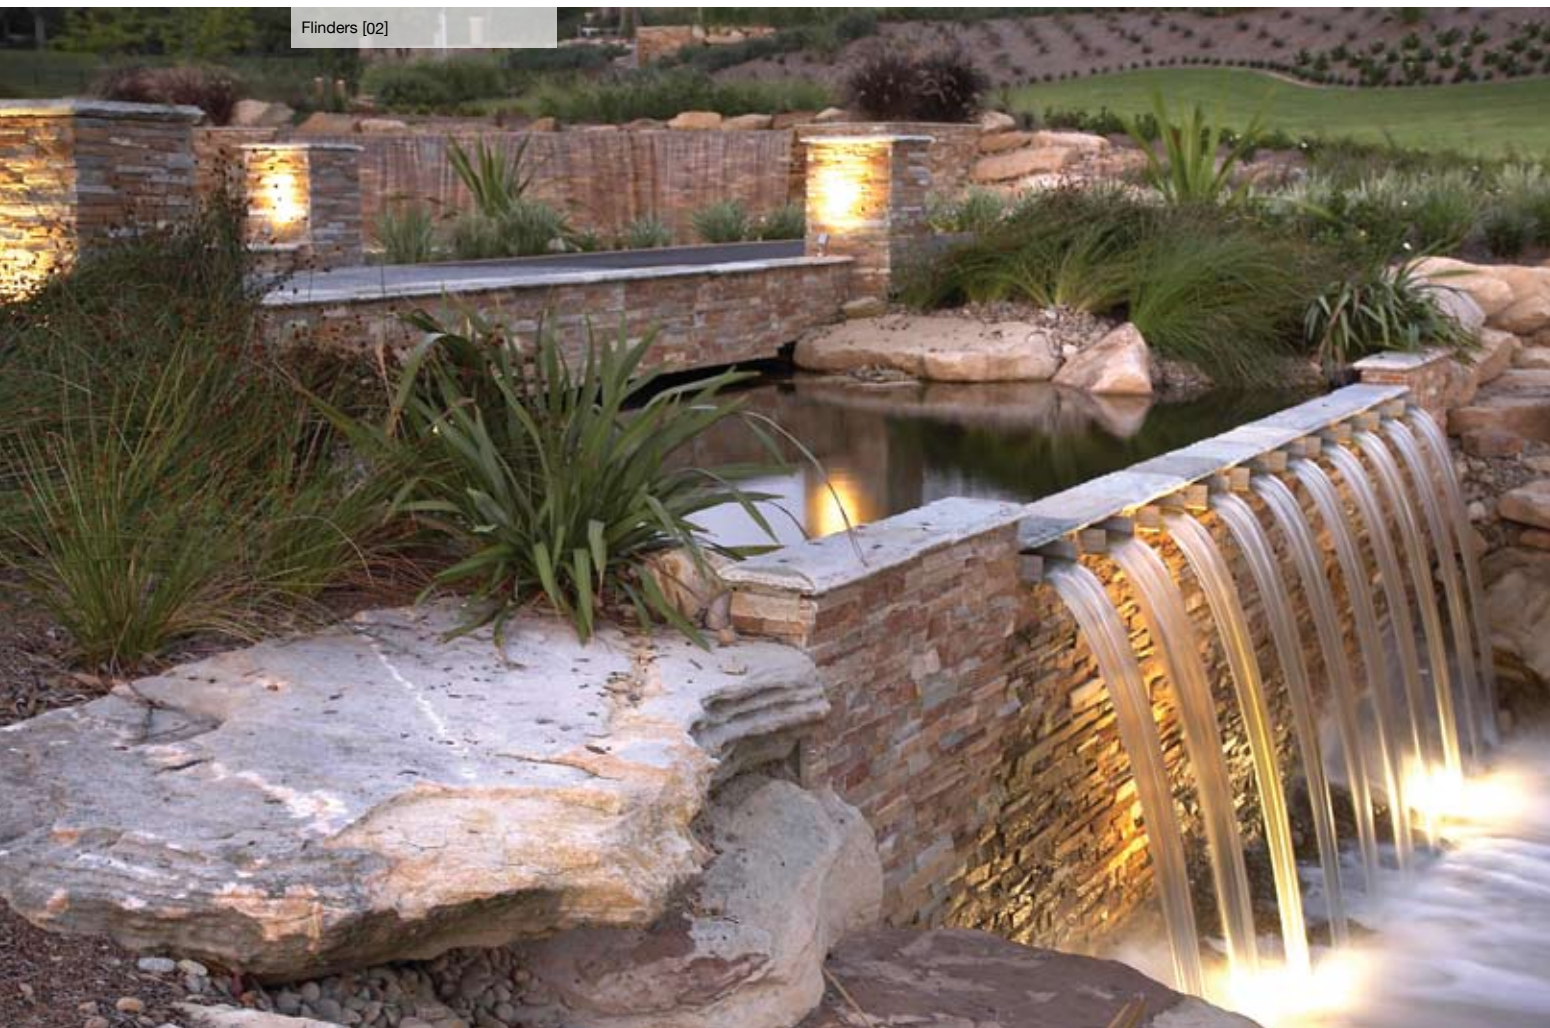

Colour Range



Feathertop



Flinders



Grampians



Lang Lang



Macedon



Otway

A selection of high resolution 3D textures is available at www.ecooutdoor.com.au




Otway [04]

**Project Credits**

- 01 Rollingstone Landscapes NSW
- 02 Rollingstone Landscapes NSW
- 03 The Garden Company VIC
- 04 Rollingstone Landscapes NSW
- 05 Rollingstone Landscapes NSW
- 06 Eckersley Garden Architecture VIC
- 07 The Garden Company VIC
- 08 Eckersley Garden Architecture VIC
- 09 Eckersley Garden Architecture VIC
- 10 Bezzina NSW
- 11 The Garden Company VIC
- 12 The Garden Company VIC
- 13 The Garden Company VIC

Flinders [05]

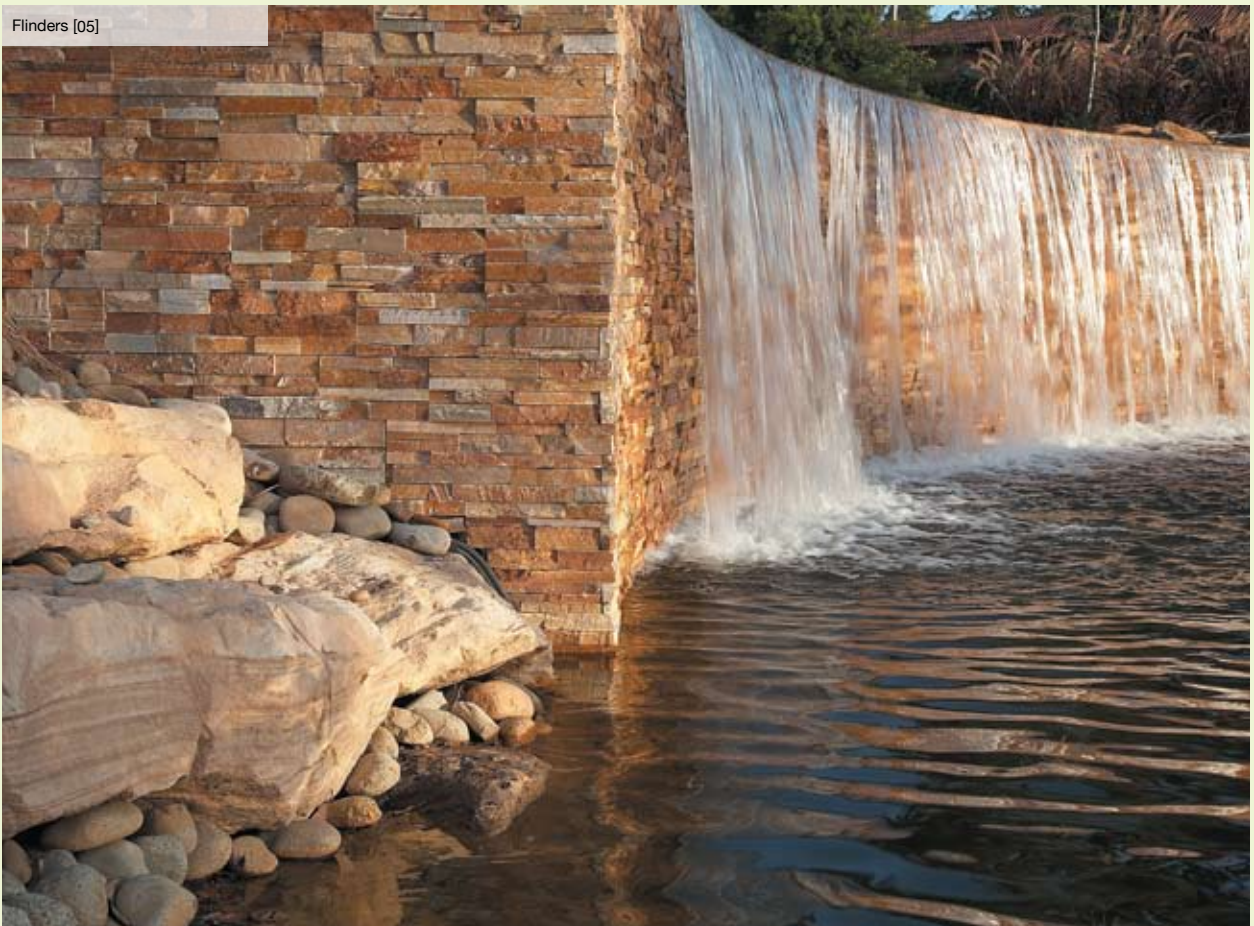

STONE WALL PANELS

+ The depth of the pieces within the panels create natural shading and light variation for an authentic feel.

Lang Lang [06]



Grampians



Feathertop



+ High dimensional accuracy ensures easy install for a controlled outcome.

STONE WALL PANELS



Top: Grampians [08]
Left: Macedon
Below: Grampian Capping



Otway [09]



STONE WALL PANELS

+

Stone panels work best when they're anchored in existing design elements, rather than floating as an isolated design feature.

Grampians



Feathertop



Flinders [10]







+ Pre-prepared columns and corner units offer a genuine appearance of structural depth and form.



Add colour, texture and warmth to highlight an area



Macedon [13]



COMMERCIAL APPLICATIONS

STONE WALL PANELS


Feathertop



Lang Lang



Lang Lang [Beacon Constructions]

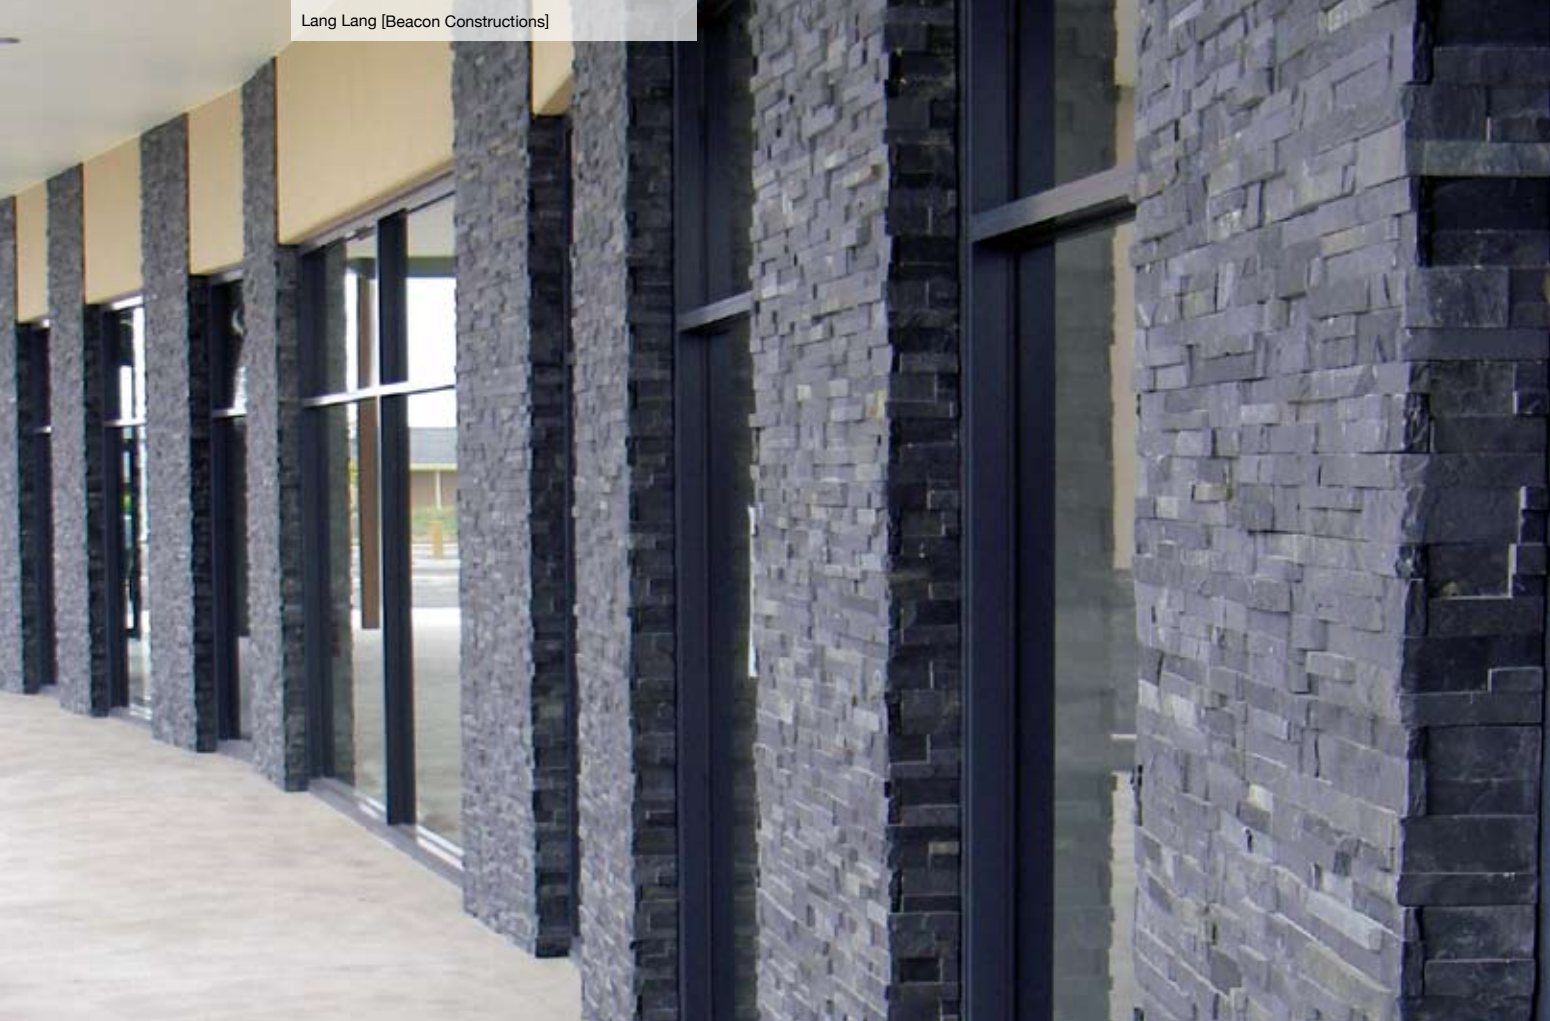

Sizes

Walling



Capping



Corners



STONE WALL PANELS

Stone wall cladding is made easy with this style of pre-made panels. All stone tiles are split on the face and sawn on the back, allowing the product to be efficiently adhered to suitable substrates.

Sizes

Walling

Split face veneer split on the front and sawn on the rear

Tiles 610x152mm

Thickness 20-40mm

Corners

Interlocking corner elements

Single corner tile

305x152mm

610x152mm

Thickness 20-40mm

Double corner tile

610x152mm

Thickness 20-40mm

*Custom sizes available on request

Capping

Split on top surface, chipped on the long sides and sawn on the bottom surface

Lengths 600mm

Width 290mm

Thickness 40-50mm

Typically these products are adhered to a concrete or block wall with a suitable tile adhesive. Corner details are slightly different for each stone type.

Tiles can be adjusted on site to deal with curved walls.

When working out quantities required for a wall, you need to know the face in m² to be covered and the number of lineal meters of corners required.

For further information, installation tips and pricing please call a showroom on 1300 13 14 13.



For more downloadable imagery visit www.ecooutdoor.com.au